


User manual


Color Tube

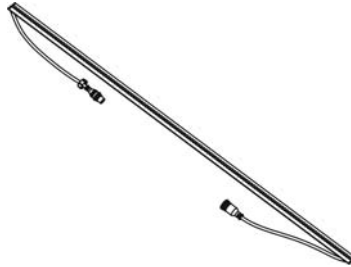

1. Attention:

- Do not install the module near high inflammable liquids or materials.
- Do not allow anything to rest on the module.
- Do not use the module near high humidity or water or expose to the rain.
- Do not install the module near the naked flames.
- Do not install the module in dirty, dusty or badly ventilated location.


2. Device connection:



Pin	Color	Function
1	Red	Red
2	Green	Green
3	Blue	Blue
4	White	24V +

3. Typical installation:

Please use an adapter cable to connect both terminal side of Color Tube, please make sure the signal input and signal output of Color Tube was link Color Commander correctly.

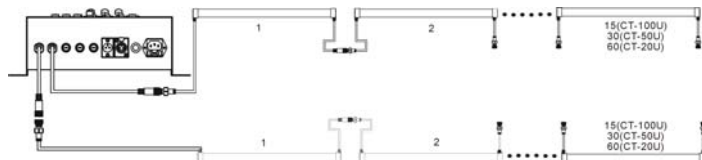

CAUTIONS: Ensure the main power supply is off before installation

4. Technical specifications:

- Max input current: 400MA
- Power consumption: 10W (CT-100U)
5W (CT-50U)
2.5W (CT-20U)
- Power supply: DC 24V

5. Maintenance

- Keep the module dry.
- Operate only in places where the sufficient air ow to cool the module is present.
- Periodically clean the front transparent cover. Use a moist, lint-free cloth. Never use alcohol or solvents!